


## ED2300 Series Standard Duty Exit Devices

For use on a single door or double doors with or without mullion. For 1-3/4" (44 mm) thick standard RHR or LHR hollow metal doors and wood doors. All devices and accessories are to be used on a 1-3/4" standard door.

- Meets ANSI A156.3 Grade 1 Standards
- Non-handed
- Trim sold separately

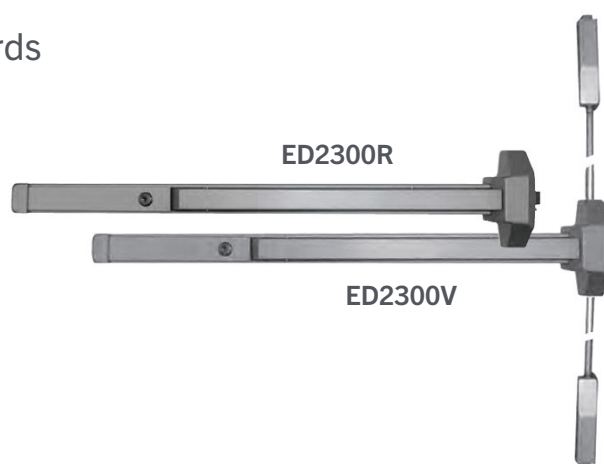

### SPECIFICATIONS

Certifications	ANSI A156.3 Grade 1, UL Listed Panic Device, UL Listed 3-hour Fire Device
Sizes	36" and 48"
Handing	Rim - Non-handed ~ SVR Field Reversible
Strike	Panic Rim Device Furnished with Roller Strike
Finish	Alum, Dark Bronze, Flat Black, Stainless Steel
Trim	Trim Sold Separately
Materials	Steel or Stainless Steel (All Springs Stainless Steel)
Mounting Hardware	Machine Screws, Sex Nuts and Bolts

250114D059