

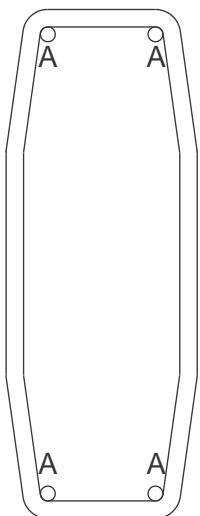

EDX9000 GBK Instructions

GENERAL LOCK


Screw size & type	QTY	Application	door		
			1-3/4" (44.45mm)	2-1/4" (57.15mm)	
A	3/16"-24X1-1/4"L	4	Surface	✓	✓
	3/16"-24X1-1/4"L	4	Sex bolts	✓	
	3/16"-24X1-1/2"L	4	LET/PET Trim	✓	
	3/16"-24X1-3/4"L	4	Sex bolts		✓
	3/16"-24X2"L	4	LET/PET Trim		✓
B	3/16"-24X1-1"L	2	Surface	✓	✓
	3/16"-24X1-1"L	2	Sex bolts	✓	
	3/16"-24X1-1/2"L	2	Sex bolts		✓

Note:

1. Shims are handed and flipped for RH or LH application.
2. Secure device with screws provided in this kit, see chart above.

Lock stile shimHinge stile shim

LHR shown
RHR opposite

Rod guide shim

(No special screws required)

